



austral

POOL & SPA PRODUCTS



PQ Series Cartridge Filter

Heavy Duty Locking Ring

Non-Corrosive Hi Impact Polymers used in Manufacture

Multiple Choice Outlet Ports for Installation





PQ Series Cartridge Filters

Robust Lockring mechanism.

Fast easy access to the element for maintenance, and a safe reliable method of sealing the lid.

Dupont Reemay Element offers years of fine grade filtration.

Automatic air bleeding eliminates the need for continual manual bleeding.

Pressure tested to 300KPA. Where maximum operating pressure is 250KPA.



Internal automatic pressure release valve prevents damage to pump and filter in the event of a blockage.

Choice of four different outlet ports for ease of installation.

50mm ports for water connection provide fast easy installation and capacity for high flow rates.

Four sizes to choose from ensures you can get the right size for your application.

Warranty. The Cartridge filter is covered by a limited 5 year Warranty. Cartridges are an expendable item.

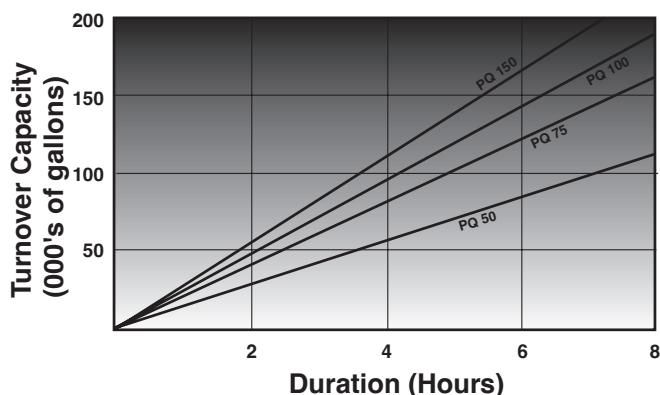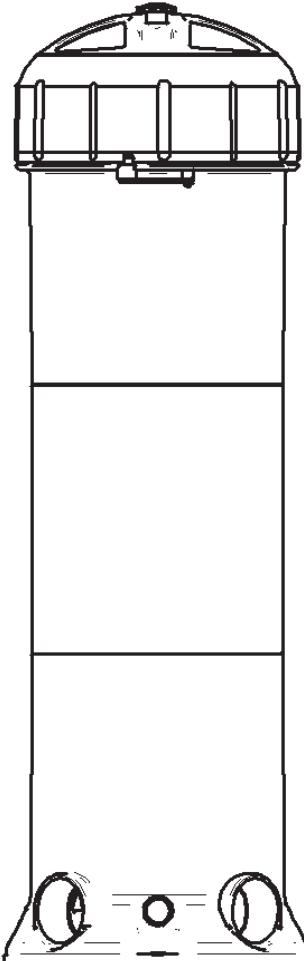

Model	Height	Flow Rate	Pump Size	Weight
P50	560mm	225lpm	550 - 750w	6.35kg
P75	680mm	290lpm	550 - 1100w	8.0kg
P100	680mm	290lpm	550 - 1100w	8.0kg
P150	930mm	375lpm	750 - 1100w	9.8kg
P200	1200mm	475lpm	550 - 1500w	12.5kg

